

BI-TELECENTRIC LENS FOR DETECTORS UP TO 1/2"



Part Number	TC 12 16	
Magnification		0,385 +/- 3%
Field Of View	(mm x mm)	
with 1/4" (3,6 x 2,7) detector		9,4 x 7,0
with 1/3" (4,8 x 3,6) detector		12,5 x 9,4
with 1/2" (6,4 x 4,8) detector		16,6 x 12,5
with 1/1.8" (7,13 x 5,37) detector		18,5 x 14,0
with 2/3" (8,8 x 6,6) detector		diam. = 17,2
Working Distance	(mm)	45,3 +/- 1
Working F-number		8
Telecentricity	(degree)	< 0,1
Distortion	(%)	< 0,08
Field Depth	(mm)	5,0
CTF @70 lp/mm	(%)	> 40
Image side N.A.		0,0620
Object side N.A.		0,0240
Mount		C
Length	(mm)	93,0
External diameter	(mm)	37,7
Weight	(g)	260

Possible vignetting at the image corners with 1/1.8" detectors

ACCESSORIES AND OPTIONS:



Collimated/Telecentric illumination:
compatible with LTCL16 illuminator;
green light suggested.



Coaxial illumination:
not available.



Back Light illumination:
Compatible with LTBK36 and LTBK48
illuminators.



Clamping Mechanics:
compatible with CMH016.





Direct illumination:
compatible with LTRN36 diffusive
anular illuminator.



Filters:
filters can be inserted in the rear part
of the lens, by means of TC Filter Kit.

Rev No.	Description	Date	Name
A	First light	01/05/03	A.Vismara
D	Redesign	15/02/06	A.Vismara
E	Length of C thread	12/01/09	A.Vismara

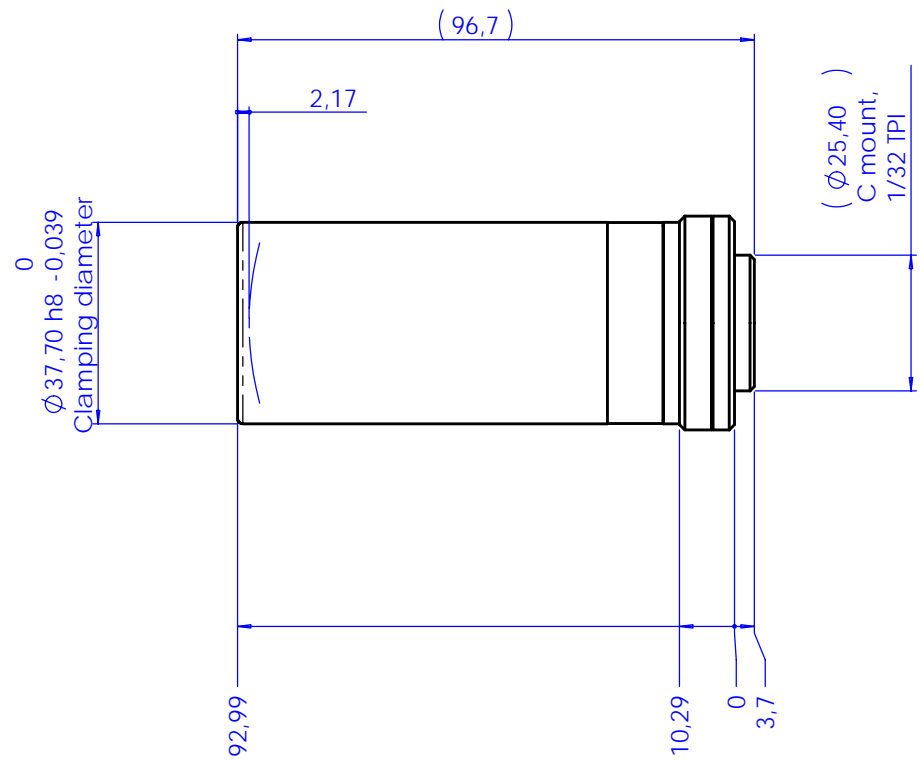

Material	N.A.			Mass	0.26 kg	Scale	1:1
Surface treatment	N.A.			Project-Prod.Item/Instrument Telecentric lens 12 16			
Geometrical tolerance (ISO 2768-2)			Class	K	Description		
Linear tolerance (ISO 2768-2)			Class	m	Undimensioned bevels	1x45°	Assembly
0.5 +3	>3- 6	>6- 30	>30- 120	>120 +400	>400- 1000	>1000 +2000	
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
			Date	Name	Drawing No.		
Designed			15/02/06	A.Vismara	01851-0-E		
Draw			12/01/09	A.Vismara	Sheet		
Checked			X	C. Sedazzari	1/1		
www.opto-engineering.com OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 29/2 - Tel. +39 0376 229585 - e-mail: info@opto-engineering.com - http://www.opto-engineering.com							