

BI-TELECENTRIC LENS FOR DETECTORS UP TO 1/2"



Model:	TC 12 64	
Magnification (X):	0,100 +/- 3%	
Object Field (mm):	1/4" (3,6 x 2,7):	36,0 x 27,0
	1/3" (4,8 x 3,6):	48,0 x 36,0
	1/2" (6,4 x 4,8):	64,0 x 48,0
	1/1.8" (7,13 x 5,37):	71,3 x 53,7 (*)
	2/3" (8,8 x 6,6):	diam. = 66,0
Working Distance (mm):	182,3 +/- 5	
Working F-number:	8	
MTF @70 lp/mm (%):	> 50	
Field Depth (mm):	60,0 @ F/ 8	
Image side N.A.:	0,062	
Object side N.A.:	0,006	
Telecentricity (degree):	< 0,08	
Distortion (%):	<0,07	
Mount:	C	
Length (mm):	226	
Maximum external diameter (mm):	100	
Weigh (g):	1000	

(*) Vignetting at the image corners possible with a 1/1.8" detector

ACCESSORIES AND OPTIONS:



Collimated/Telecentric illumination:
compatible with LTCL64 illuminator;
green light suggested.



Coaxial illumination:
compatible with LTCX64 illuminator.



Back Light illumination:
compatible with LTBK64 illuminator.



Clamping Mechanics:
compatible with Teleclamp64.




Direct illumination:
compatible with LTRN64 diffusive
anular illuminators.



Filters:
filters can be inserted in the rear part
of the lens, by means of TC Filter Kit.

Rev No.	Description	Date	Name
A	First light	01/05/03	A.Vismara
D	Redesign	15/02/06	A.Vismara

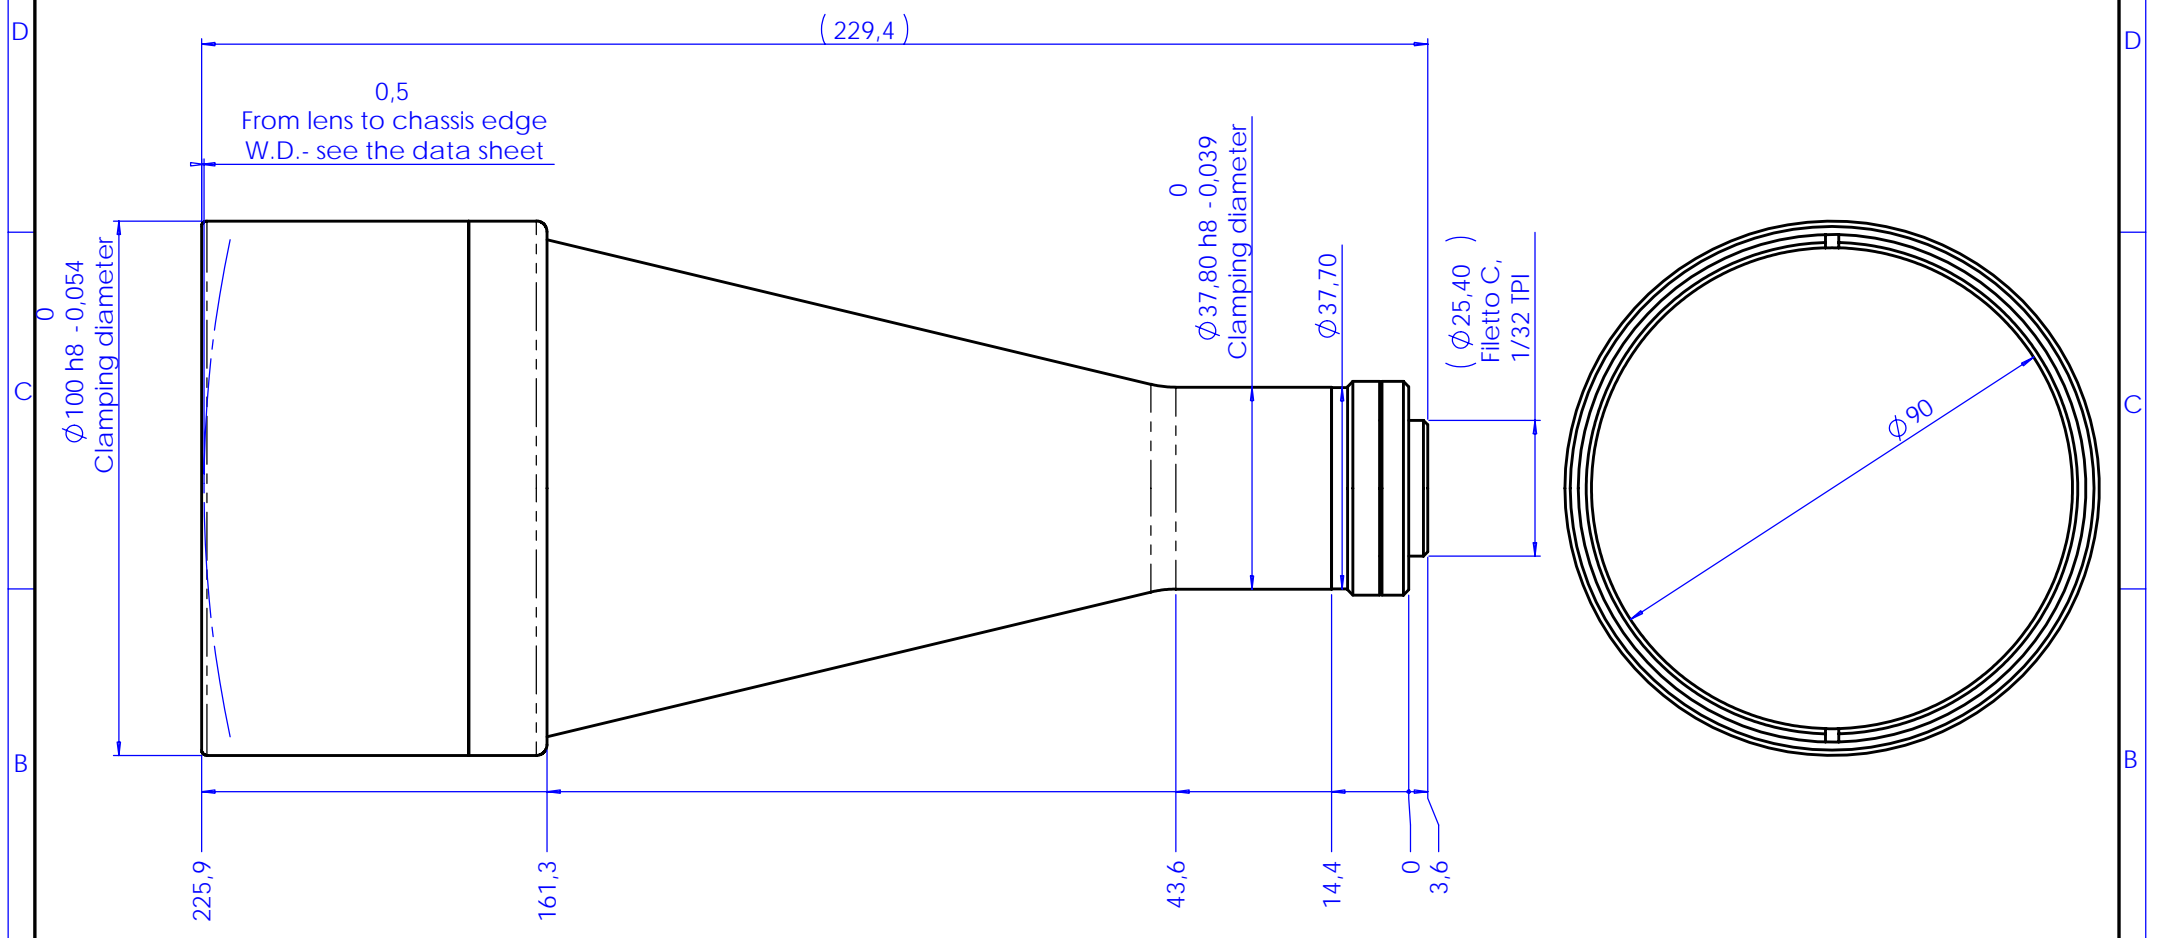

Material	N.A.			Mass	1.0 kg	Scale	1:1
Surface treatment	N.A.			Project-Prod.Item/Instrument Telecentric lens 12 64			
Geometrical tolerance (ISO 2768-2)			Class	K	Description		
Linear tolerance (ISO 2768-2)			Class	m	Undimensioned bevels	1x45°	Assembly
0.5	>3-	>6-	>30-	>120	>400-	>1000	
+3	6	30	120	+400	1000	+2000	R 0.5
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
www.opto-engineering.com			Date	Name		Drawing No.	
			Designed	15/02/06	A.Vismara	01301-0-D	
			Draw	15/02/06	A.Vismara	Sheet	
			Checked	X	C. Sedazzari	1/1	
OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 28 - Tel. +39 0376 229585 - e-mail: info@opto-engineering.com - http://www.opto-engineering.com							