

BI-TELECENTRIC LENS FOR DETECTORS UP TO 2/3"



Model:	TC 23 120	
Magnification (X):	0,072 +/- 3%	
Object Field (mm):	1/4" (3,6 x 2,7):	50,3 x 37,7
	1/3" (4,8 x 3,6):	67,0 x 50,3
	1/2" (6,4 x 4,8):	89,4 x 67,0
	1/1.8" (7,13 x 5,37):	99,5 x 75,0
	2/3" (8,8 x 6,6):	122,9 x 92,2
Working Distance (mm):	336,5 +/- 10	
Working F-number:	8	
MTF @70 lp/mm (%):	> 35	
Field Depth (mm):	105,0 @	F/ 8
Image side N.A.:	0,062	
Object side N.A.:	0,004	
Telecentricity (degree):	< 0,08	
Distortion (%):	<0,1	
Mount:	C	
Length (mm):	422	
Maximum external diameter (mm):	180	
Weigh (g):	5300	

ACCESSORIES AND OPTIONS:



Collimated/Telecentric illumination:
compatible with LTCL120 illuminator;
green light suggested.



Coaxial illumination:
not available.



Back Light illumination:
compatible with LTBK96 illuminator.



Clamping Mechanics:
use the built-in holed flange to mount
the lens.






Direct illumination:
not available.



Filters:
filters can be inserted in the rear part
of the lens, by means of TC Filter Kit.

Rev No.	Description	Date	Name
A	First light	14/04/06	A.Vismara

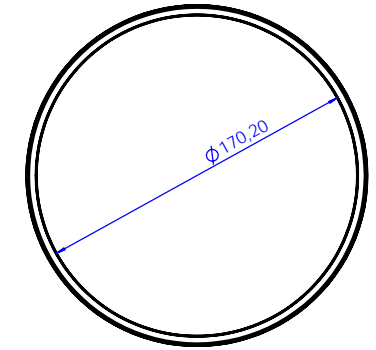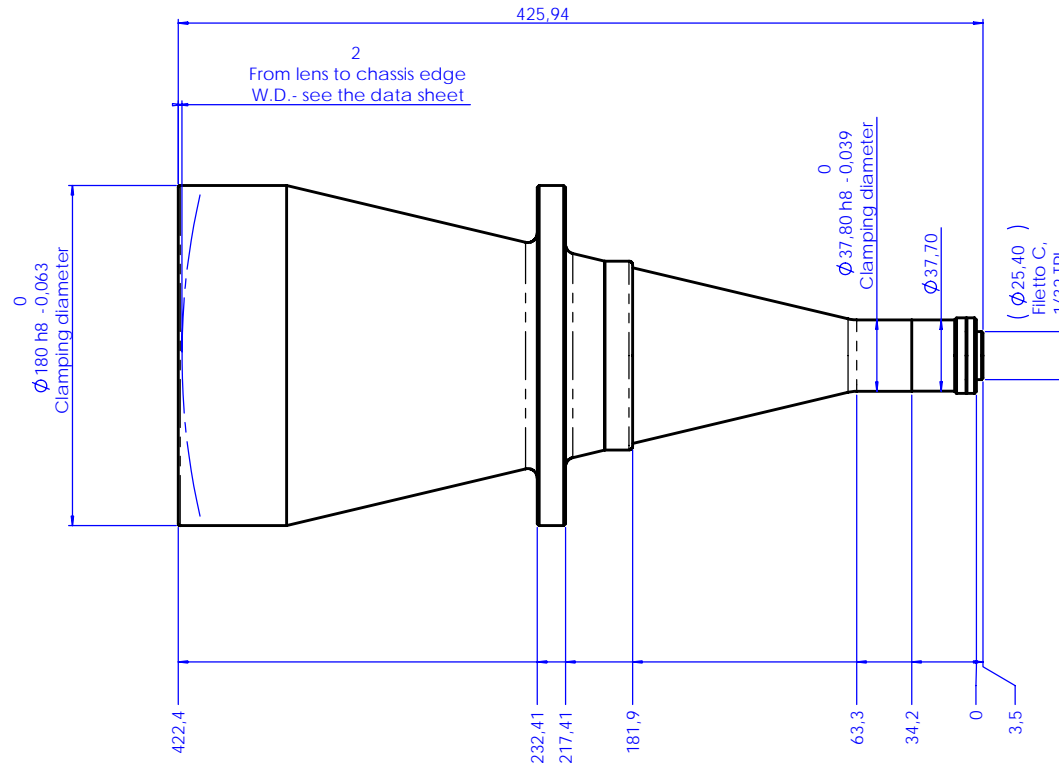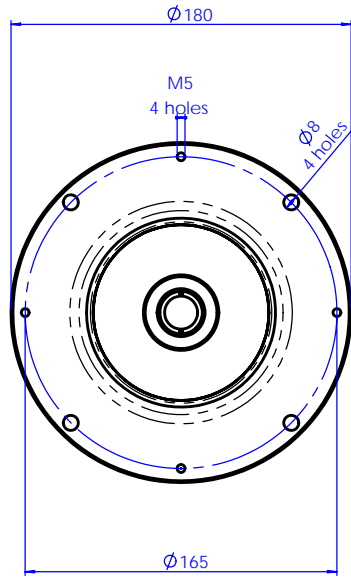

Material	N.A.	Mass	5.3 kg	Scale	1:2
Surface treatment	N.A.	Project-Prod.Item/Instrument	Telecentric lens 23 120		
Geometrical tolerances (ISO 2768-2)		Class	K	Undimensioned Bevels	1x45°
Linear tolerance (ISO 2768-2)		Class	m	Undimensioned radii	R 0.5
0.5	>3-	>6-	>30-	>120	>400-
-3	6	30	120	400	1000
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8
					±1.2
Date		Name		Drawing No.	
Designed 14/04/06		A.Vismara		02501-0-A	
Draw 14/04/06		A.Vismara		Sheet 1/1	
Checked x		C.Sedazzari		Reproduction forbidden without specific authorization	
OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 28 - Tel/Fax +39 0376 229585 - e-mail info@opto-engineering.com - http://www.opto-engineering.com					