

BI-TELECENTRIC LENS FOR DETECTORS UP TO 2/3"



Model:	TC 23 24	
Magnification (X):	0,350	
Object Field (mm):	1/4" (3,6 x 2,7):	10,3 x 7,7
	1/3" (4,8 x 3,6):	13,7 x 10,3
	1/2" (6,4 x 4,8):	18,3 x 13,7
	1/1.8" (7,13 x 5,37):	20,4 x 15,3
	2/3" (8,8 x 6,6):	25,1 x 18,9
Working Distance (mm):	69,2 +/- 2	
Working F-number:	8	
MTF @70 lp/mm (%):	> 45	
Field Depth (mm):	7,0 @ F/ 8	
Image side N.A.:	0,062	
Object side N.A.:	0,022	
Telecentricity (degree):	< 0,1	
Distortion (%):	< 0,10	
Mount:	C	
Length (mm):	138	
Maximum external diameter (mm):	44	
Weigh (g):	410	

ACCESSORIES AND OPTIONS:




Collimated/Telecentric illumination:
compatible with LTCL24 illuminator;
green light suggested.



Coaxial illumination:
not available.



Back Light illumination:
Compatible with LTBK36 illuminator.



Clamping Mechanics:
the lens is light and can be directly
held by the camera.





Direct illumination:
compatible with LTRN36 diffusive
anular illuminators.



Filters:
filters can be inserted in the rear part
of the lens, by means of TC Filter Kit.

Rev No.	Description	Date	Name
A	First light	01/05/03	A.Vismara
D	Redesign	18/07/06	A.Vismara
E	Length of C thread	12/01/09	A.Vismara

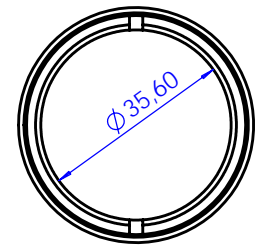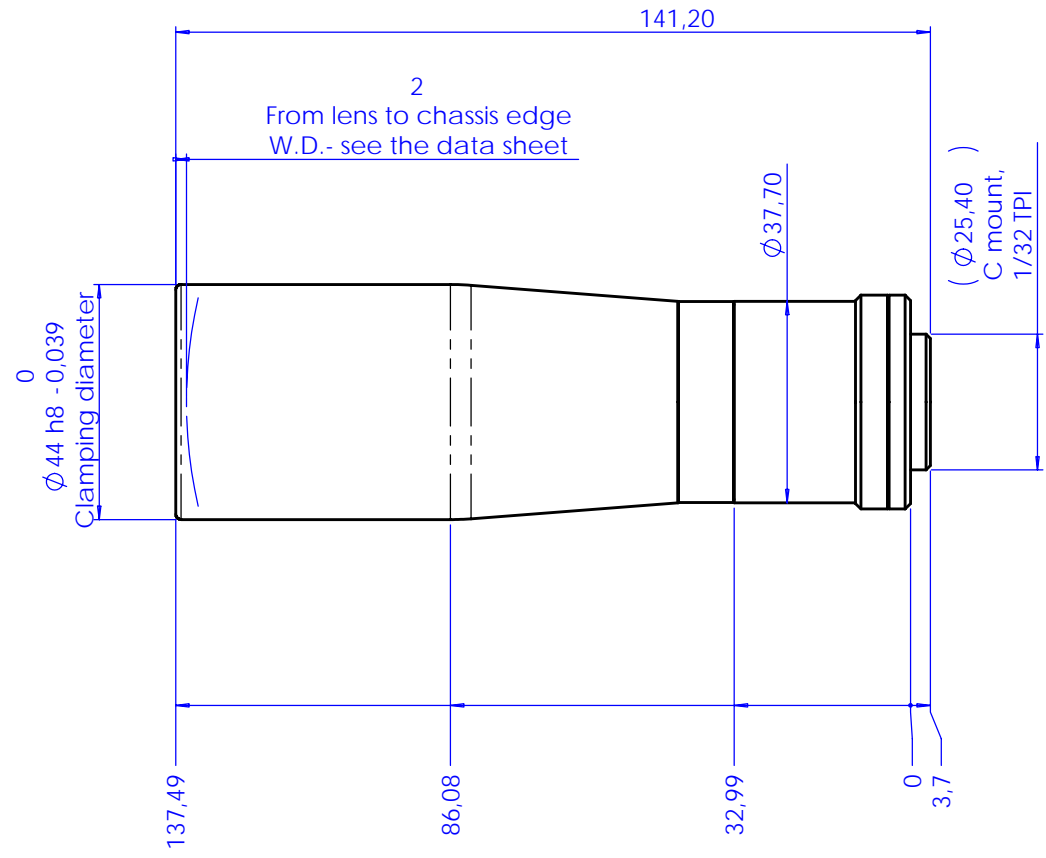

Material	N.A.			Mass	0.41 kg	Scale	1:1
Surface treatment	N.A.			Project-Prod.Item/Instrument Telecentric lens 23 24			
Geometrical tolerance (ISO 2768-2)			Class	K	Description		
Linear tolerance (ISO 2768-2)			Class	m	Undimensioned bevels	1x45°	Assembly
0.5	>3-	>6-	>30-	>120	>400-	>1000	
+3	6	30	120	+400	+1000	+2000	R 0.5
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
www.opto-engineering.com			Date		Name		
			Designed	18/07/06	A.Vismara		
			Draw	12/01/09	A.Vismara		
			Checked	X	C. Sedazzari		
OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 28 - Tel. +39 0376 229585 - e-mail: info@opto-engineering.com - http://www.opto-engineering.com			Drawing No.		01501-0-E		Sheet
							1/1
Reproduction forbidden without specific authorization							